



MY SEWING ROOM Quilt 1

Finished Quilt Size: 55" x 55"

Fabrics in the Collection




Ric Rac Stripe - Grey
9968-90




Ric Rac Stripe - Light Teal
9968-16



Large Sewing Stripe - Multi
9967-19

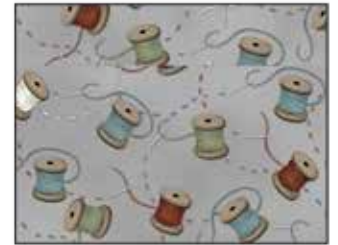

Sewing Spools - Grey
9966-90

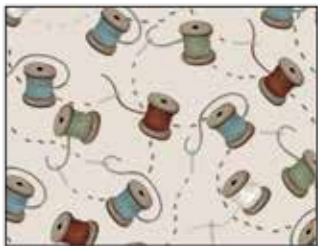

Sewing Spools - Ecrú
9966-40



Rustic Plaids - Tan/Brown
9965-44



Rustic Plaids - Teal
9965-16



Sewing Motifs - Charcoal
9964-90




Sewing Motifs - Ecrú
9964-40



Tossed Sewing Machines - Charcoal
9963-90



Tossed Sewing Machines - Ecrú
9963-40



Buttons - Grey
9962-90



Buttons - Ecrú
9962-40



Sewing Words - Green
9961-66



Sewing Words - Tan
9961-33



Sewing Blocks - Multi
9960P-19

My Sewing Room

By Kathi Campbell of Heart to Hand

Quilt 1



Skill Level: Advanced Beginner

A Free Project Sheet From

 Henry Glass & Co., Inc.



facebook

Finished Quilt Size: 55" x 55"
49 West 37th Street, New York, NY 10018
tel: 212-686-5194 fax: 212-532-3525
Toll Free: 800-294-9495
www.henryglassfabrics.com

Materials

¼ yard	Rustic Plaids - Tan/Brown (A)	9965-44
⅝ yard	Ric Rac Stripe - Grey (B)	9968-90
⅝ yard	Sewing Spools - Ecrú (C)	9966-40
½ yard	Tossed Sewing Machines - Charcoal (D)	9963-90
⅞ yard	Rustic Plaids - Teal (E)	9965-16
⅝ yard	Buttons - Ecrú (F)	9962-40
½ yard	Sewing Motifs - Ecrú (G)	9964-40
1 yard	Buttons - Grey (H)	9962-90*
1 ¾ yards	Large Sewing Stripe - Multi (I)	9967-19
⅓ yard	Sewing Words - Green (J)	9961-66
3 ½ yards	Sewing Spools - Grey (Backing)	9966-90

*Includes binding

Quilt Cutting Instructions

Please note: all strips are cut across the width of fabric (WOF) from selvage to selvage edge unless otherwise noted.

From the Rustic Plaids - Tan/Brown (A), cut:

- (1) 4 ½" x 22 ½" WOF strip.

From the Ric Rac Stripe - Grey (B):

- See instructions to cut (1) sewing machine.

From the Sewing Spools - Ecrú (C), cut:

- (1) 18 ½" x 22 ½" WOF strip.

From the Tossed Sewing Machines - Charcoal (D), cut:

- (2) 6 ½" x WOF strips. Sub-cut strips into (8) 6 ½" squares.

From the Rustic Plaids - Teal (E), cut:

- (13) 2" x WOF strips. Sub-cut strips into (256) 2" squares.

From the Buttons - Ecrú (F), cut:

- (6) 2" x WOF strips. Sub-cut strips into (64) 2" x 3 ½" strips.
- (2) 2" x WOF strips. Sub-cut strips into (32) 2" squares.

From the Sewing Motifs - Ecrú (G), cut:

- (2) 6 ½" x WOF strips. Sub-cut strips into (8) 6 ½" squares.

From the Buttons - Grey (H), cut:

- (6) 2" x WOF strips. Sub-cut strips into (64) 2" x 3 ½" strips.
- (2) 2" x WOF strips. Sub-cut strips into (32) 2" squares.
- (6) 2 ½" x WOF strips for the binding.

From the Large Sewing Stripe - Multi (I), cut:

- (4) 3" x 31" length of fabric (LOF) strips.
- (4) 4 ½" x 59" LOF strips.

From the Sewing Words - Green (J), cut:

- (3) 1 ½" x WOF strips. Sew the strips together end to end with diagonal seams and cut (2) 1 ½" x 45 ½" strips.
- (3) 1 ½" x WOF strips. Sew the strips together end to end with diagonal seams and cut (2) 1 ½" x 47 ½" strips.

From the Sewing Spools - Grey (Backing), cut:

- (2) 63" x WOF strips for the backing. Sew the strips together and trim to make the 63" x 63" back.

Sewing Instructions

1. Sew (1) $4\frac{1}{2}$ " x $22\frac{1}{2}$ " Fabric A strip to the bottom of (1) $18\frac{1}{2}$ " x $22\frac{1}{2}$ " Fabric C strip to make (1) AC block (Fig. 1).

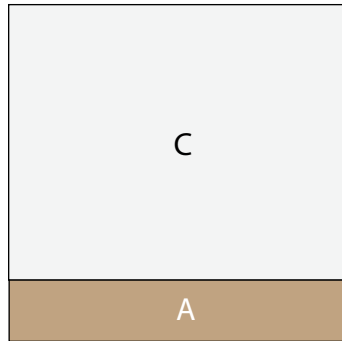


Fig. 1

2. Following the manufacturer's instructions, trace the sewing machine template onto the paper side of the fusible web. Roughly cut out the template about $\frac{1}{8}$ " outside the drawn lines.

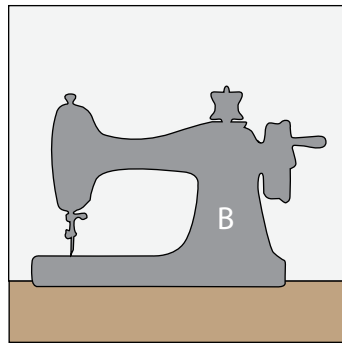


Fig. 2

3. Press the template onto the wrong side of the Fabric B piece. Cut out the template on the drawn lines.

4. Arrange and press the sewing machine onto the AC block (Fig. 2).

5. Finish the raw edges of the sewing machine with a decorative stitch such as a buttonhole or satin stitch to make the Center Block.

6. Center (1) 3 " x 31 " Fabric I strip on one side of the Center Block and pin in place. Start sewing the strip a $\frac{1}{4}$ " from the top edge of the Center Block and stop a $\frac{1}{4}$ " from the bottom edge. **DO NOT TRIM THE EXCESS.** Repeat with the opposite side.

7. Repeat Step 6 to sew (1) 3 " x 31 " Fabric I strip to the top and to the bottom of the Center Block, making sure to stop and start $\frac{1}{4}$ " away from each end of the Center Block. To miter each corner, fold the block on a diagonal, wrong side together. This should line up the strips from adjacent sides (Fig. 3).

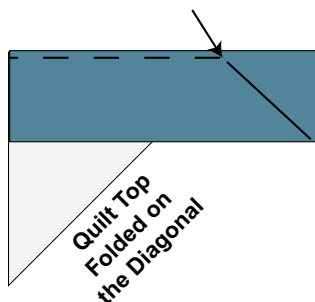


Fig. 3

8. Starting at the sewn seam (represented by the arrow in Figure 3), draw a 45-degree line to the edge of the fabric. Sew on the drawn line. Trim the excess fabric leaving a $\frac{1}{4}$ " seam. Repeat this step with the remaining corners to make the Sewing Machine Block (Fig. 4).

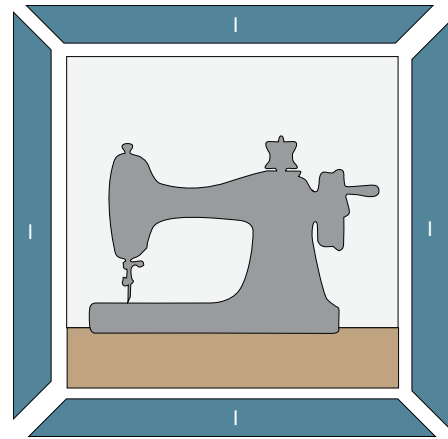


Fig. 4

9. Place (1) 2 " Fabric E square on the left side of (1) $2\frac{1}{2}$ " x $3\frac{1}{2}$ " Fabric H strip, right sides together (Fig. 5). Sew across the diagonal of the square from the upper right corner to the lower left corner (Fig. 5). Flip open the triangle formed and press (Fig. 6). Trim away the excess fabric from behind the triangle, leaving a $\frac{1}{4}$ " seam allowance.




Fig. 5




Fig. 6

10. Place another 2 " Fabric E square on the right side of the $2\frac{1}{2}$ " x $3\frac{1}{2}$ " Fabric H strip, right sides together (Fig. 7). Sew across the diagonal of the square from the upper left corner to the lower right corner (Fig. 7). Flip open the triangle formed and press (Fig. 8). Trim away the excess fabric from behind the triangle, leaving a $\frac{1}{4}$ " seam allowance to make (1) EHE unit.




Fig. 7




Fig. 8

11. Repeat Steps 9-10 to make (64) EHE units total.

12. Sew (2) EHE units together end to end to make (1) HH strip. Repeat to make (32) HH strips total.

13. Repeat Steps 9-10 using (64) 2" x 3 1/2" Fabric F strips and (128) 2" Fabric E squares to make (64) EFE units (Fig. 9).




Fig. 9

14. Sew (2) EFE units together end to end to make (1) FF strip. Repeat to make (32) FF strips total.

15. Sew (1) HH strip to each side of (1) 6 1/2" Fabric G square. Sew (1) 2" Fabric H square to each end of (1) HH strip. Repeat to make a second strip. Sew the strips to the top and to the bottom of the Fabric G square to make (1) Block One (Fig. 10). Repeat to make (8) Block Ones total.

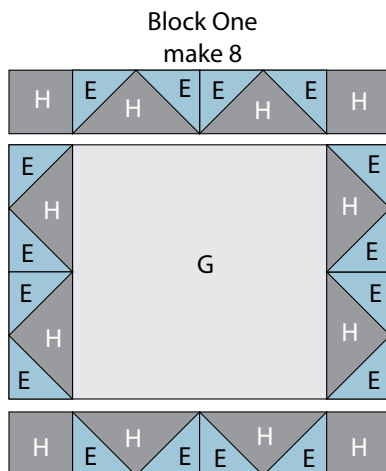


Fig. 10

16. Sew (1) FF strip to each side of (1) 6 1/2" Fabric D square. Sew (1) 2" Fabric F square to each end of (1) FF strip. Repeat to make a second strip. Sew the strips to the top and to the bottom of the Fabric D square to make (1) Block Two (Fig. 11). Repeat to make (8) Block Twos total.

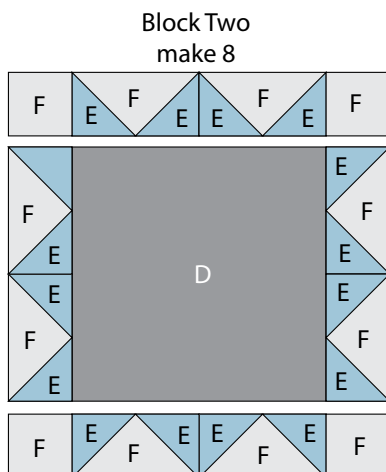


Fig. 11

Quilt Top Assembly

(Refer to the Quilt Layout while assembling.)

17. Sew (1) Block One to the top and to the bottom of one Block Two to make (1) strip. Repeat to make a second strip. Sew (1) strip to each side of the Sewing Machine Block. Sew (3) Block Twos and (2) Block Ones together, alternating them, to make (1) strip. Repeat to make a second strip. Sew the strips to the top and to the bottom of the Sewing Machine Block to make the quilt top.


18. Sew (1) 1 1/2" x 45 1/2" Fabric J strip to each side of the quilt top. Sew (1) 1 1/2" x 47 1/2" Fabric J strip to the top and to the bottom of the quilt top.

19. Repeat Steps 6-8 using the (4) 4 1/2" x 59" Fabric I strips to add the outer borders of the quilt top.

20. Layer and quilt as desired.

21. Sew the (6) 2 1/2" x WOF Fabric H strips together, end to end with 45-degree seams, to make the binding. Fold this long strip in half lengthwise with wrong sides together and press.

22. Bind as desired.

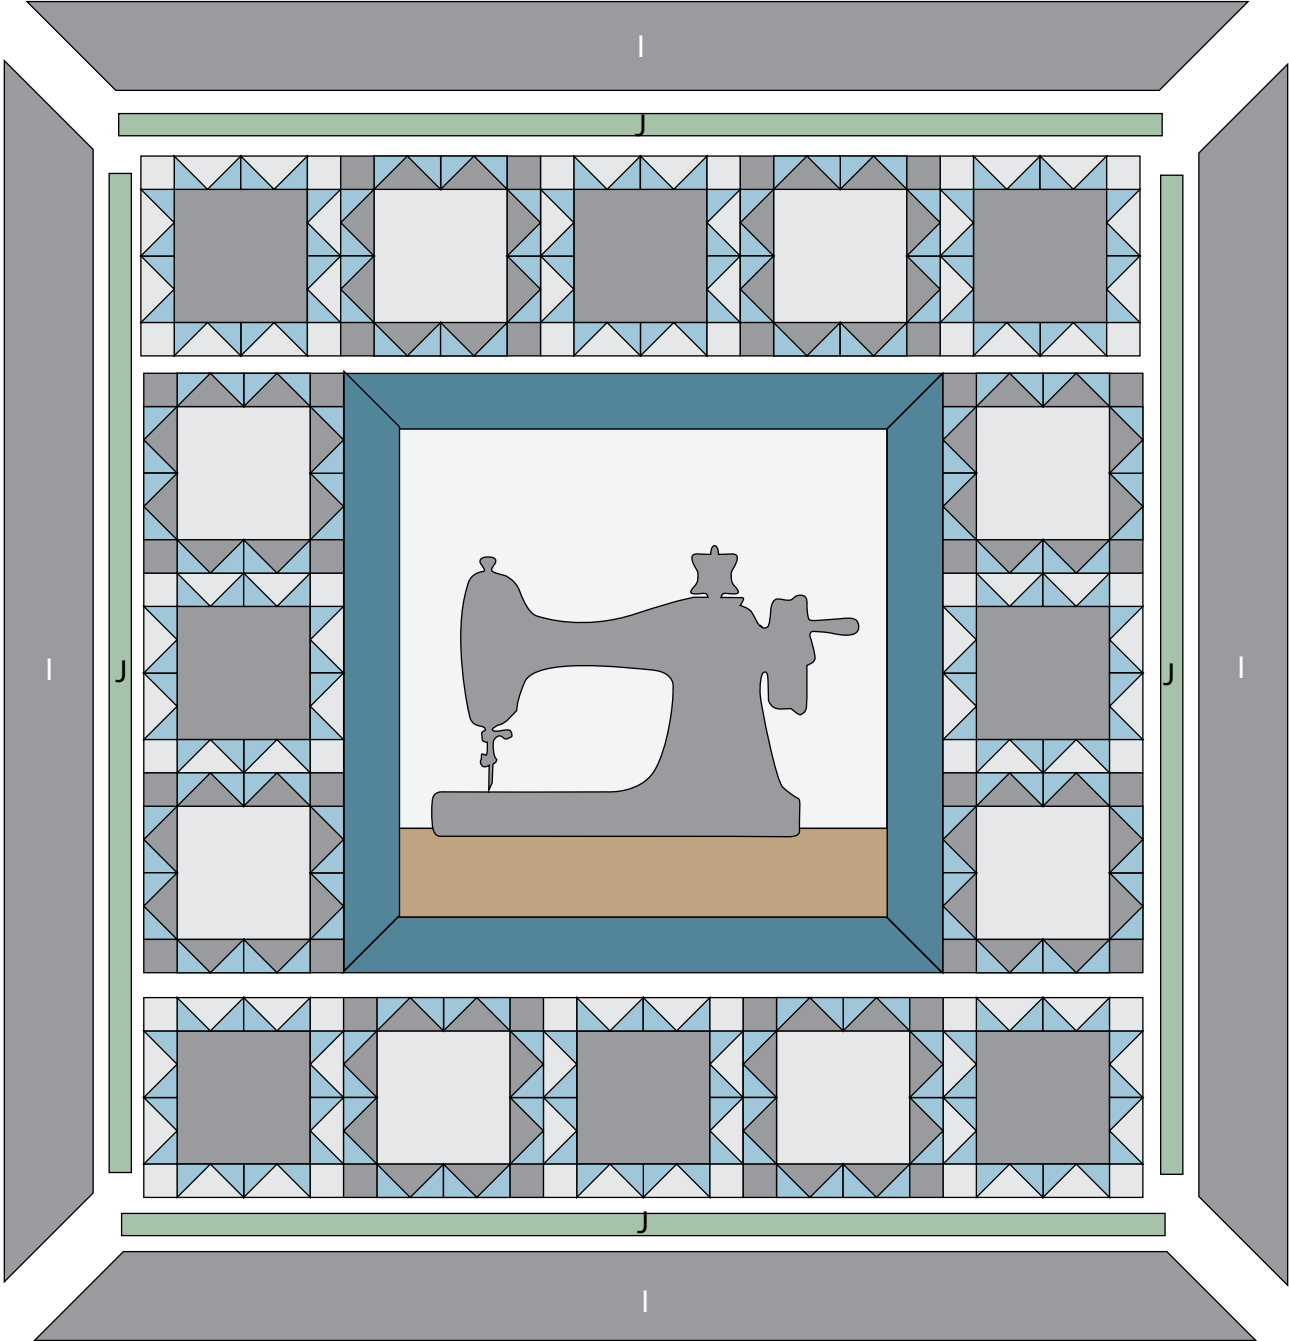

Quilt Layout

MY SEWING ROOM

Quilt 1

ENLARGE 200%
Reversed for fusible Applique

