

Snappy Strap



The RBD Designers



Snappy Strap

Supplies Needed:

Main Fabric: 6 1/2" x WOF (width of fabric)
Accent Fabric: 2 1/2" x WOF
Fusible Interfacing: 2 1/2" strip
2 key rings or clasps



Cutting Instructions:

1. Main Fabric
Cut 1 – 6 1/2" x WOF. Cut off selvage edges.
2. Accent Fabric
Cut 2 – 2 1/2" x 3" pieces.
3. Fusible Interfacing
Cut 2 – 2 1/2" x 3" pieces.

Sewing Instructions


1. Strap
With RST (right sides together), fold main fabric strip in half lengthwise and stitch 1/4" down long side.
2. Accent Tubes
Press wrong side of 2 1/2" x 3" accent piece to bumpy side of 2 1/2" x 3" interfacing piece.
Fold top (3" side) down about 1/2" and press.
Repeat for bottom.
Top stitch along top and bottom.
Fold in half so that raw edges are together.
Stitch 1/4" down side.
Turn right sides out.
Repeat to make 2.
String accent tube onto strap.

3"

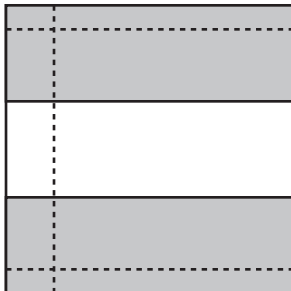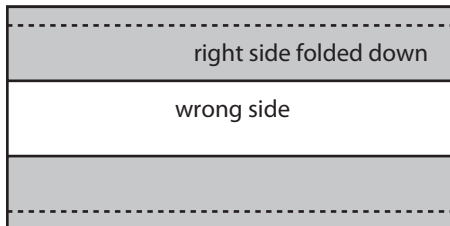

3. Construction

Fold ends of camera strap together to be about 1" across.

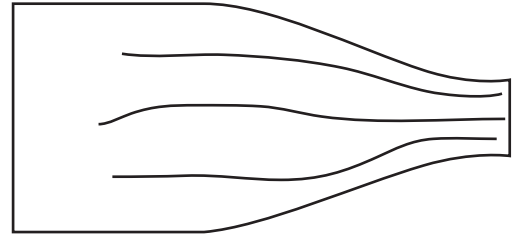

Fold back 1/2" and add key ring.
Fold back another 1/2" over ring and stitch down.
Bring accent tube over seam.
Repeat for other side.
Attach rings to camera.